


902

MAST MULTIPLEXERS

CE

Multiplexers - 3 inputs

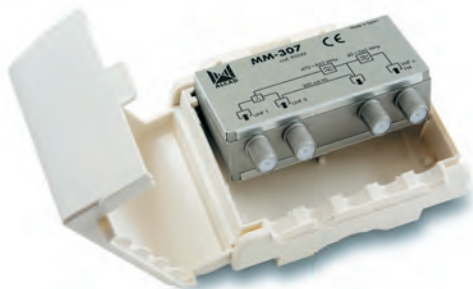

MM-307



MM-303

Description

Multiplexers for masts, or by bands, of three inputs. They mix the signals from several antennas in a single coaxial cable.

Applications

Individual digital and analogue terrestrial TV installations. In installations where the reception levels are adequate (60 to 75 dB μ V) the signals of all the antennas can be combined to distribute them in the building with a single coaxial cable.

Characteristics

Shielded zamak chassis, covered by an ABS plastic box for outdoor use. Fixed to the mast by means of a polyamide clamp. F-type connectors. Supplied in individual or multiple packs.

CODE	9020017				9020042			
MODEL	MM-303				MM-307			
Connection	F female							
Inputs	3				3			
Frequency range	Band	FM	BIII	UHF	VHF	UHF1	UHF2	
	MHz	88-108	160-260	470-862	10-260	470-862		
Insertion loss	dB \pm TOL	0.2 \pm 0,6		1.5 \pm 0,5	0.5 \pm 0,3	4.0 \pm 0,6		
Flatness response	dB	\pm 0.3			\pm 0.25			
Isolation between inputs	dB	-			-	\geq 15		
Rejection between inputs	dB	-			\geq 30			
Return loss I/O	dB	\geq 10			11	13		
Fixed DC path	mA	-	60 (switchable)		-	200		
Chroma-luminance delay	ns	-			<1			
Operating temperature	$^{\circ}$ C	-10..+65						
Protection index		IP 53						
Units per packaging		1				24		
Packing weight	Kg	0.16				4.1		
Packing dimensions	mm	113 x 103 x 45				310 x 205 x 250		