


Alcad Multiband amplifiers

Model : CF-511

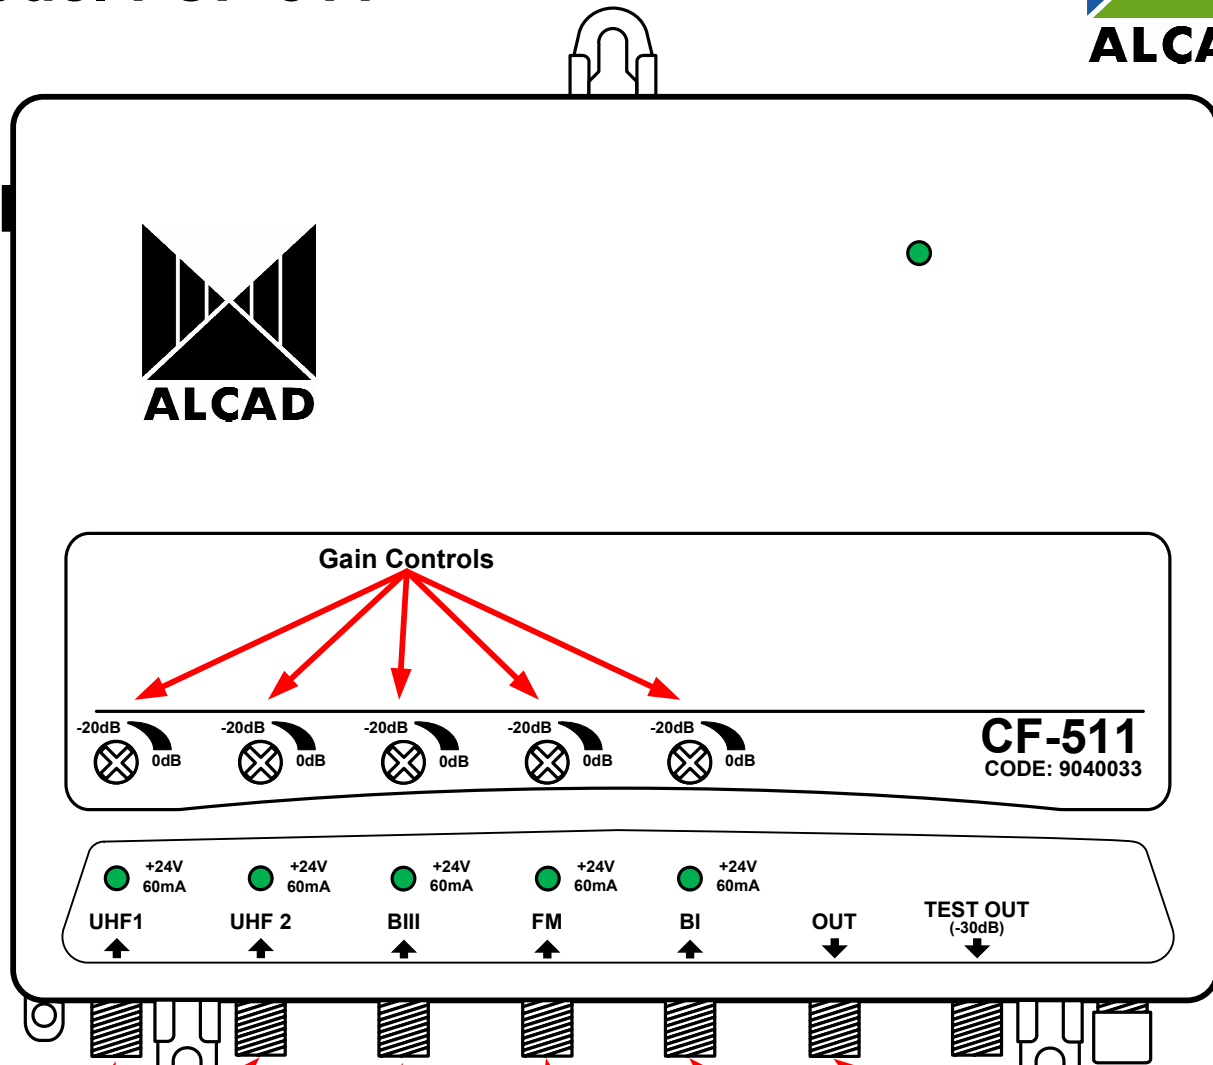

Separate inputs covering UHF (470 ~ 862 MHz)

Inputs covering BIII (160 ~ 260 MHz)

Inputs covering FM (88~108 MHz)

Inputs covering BI (47~68 MHz)

Single output covering VHF/UHF (47 ~ 862 MHz)

Main features:

- Amplify separate input signal and provide single amplified output, combining all inputs.
- Able to provide power for Masthead units from each input port
- Use as a Headend in small to medium projects.
- Maximum output 115 dB μ V
- Separate gain adjustment for each input.
- Test points on output permits checking of levels of signal.
- Amplifier housing made from Zamak and galvanised plate for maximum shielding.

Output :	UHF x 2 inputs	BIII	BI	FM
Gain	45 dB	40 dB	40 dB	40 dB
Adjustable gain	20 dB	20 dB	20 dB	20 dB