


# Alcad Apartment amplifiers

## Model : AI-200

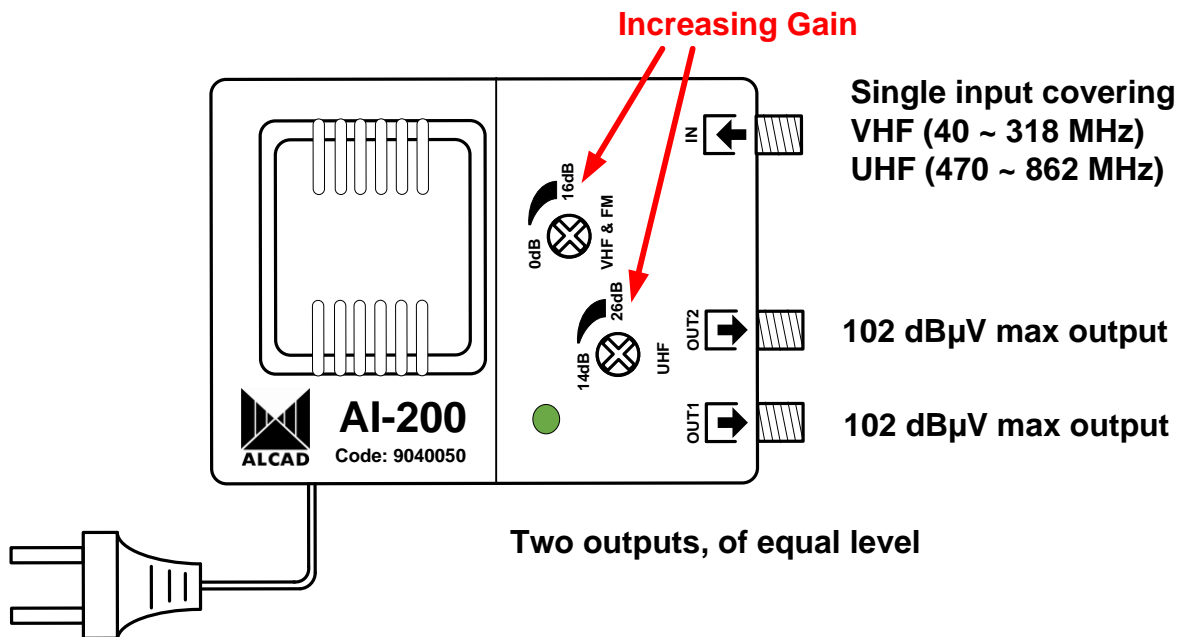

### Main features:

- Amplify the VHF/UHF band (40 to 318MHz and 470 to 862 MHz).
- Use to compensate for losses incurred due to long cable runs
- Or compensate for the losses of splitters used in feeding multiple TV points in the apartment.
- Two outputs, main and secondary output of equal value. Both outputs can be used if required.
- Separate adjustment for VHF and UHF bands.
- Compact amplifier housing.

|                  |                           |                            |
|------------------|---------------------------|----------------------------|
| <b>Output 1:</b> | <b>VHF (40 ~ 318 MHz)</b> | <b>UHF (470 ~ 862 MHz)</b> |
| Total Gain       | 14 dB                     | 24 dB                      |
| Adjustable gain  | 16 dB                     | 12 dB                      |
| <b>Output 2:</b> | <b>VHF (40 ~ 318 MHz)</b> | <b>UHF (470 ~ 862 MHz)</b> |
| Total Gain       | 14 dB                     | 24 dB                      |
| Adjustable gain  | 16 dB                     | 12 dB                      |